



LYDOS ECO

- / Performancë e lartë
- / Komfort i plotë
- / Cilësi të përhershme
- / Dizajn Eksklusiv
- / Gama: Vertikale 50,80,100 l

Tel: +355 52 220 601

Mob: +355 67 60 86 000

Web: www.thermoservice.al

eMail: info@thermoservice.a

Adresa:

Lgj. nr.17, RR."Hysen Kërtusha",Durrës

LYDOS ECO

NEW



WATER PLUS



ECO EVO FUNCTION



ABSOLUTE SAFETY SYSTEM



SHOWER READY



TITAN SHIELD



ENERGY EFFICIENT



ITALIAN DESIGN



LED DISPLAY



ENERGY CLASS



1.PERFORMANCË E LARTË

/ Teknologjia **WaterPlus***:

jep deri në 16%** më shumë ujë të ngrohtë.

/ Funkcioni **ECO EVO** i mundësuar nga CoreTECH: mundëson deri në 14% kursim të energjisë

/ Në përputhje me rregulloren kryesore të ESWH

2. COMFORT I PLOTË

/ Cilësimet manuale për rregullimin e sakte të temperaturës


/ Ikona "Ready" që tregon disponueshmërinë e parë të dushit

/ Sistem absolut të sigurisë duke ruajtur funksionimin sistematik të produktit.

3. DIZAJN EKSKLUZIV

/ Projektuar në Itali

/ Ndërfaqe frontale High-Tech & user-friendly

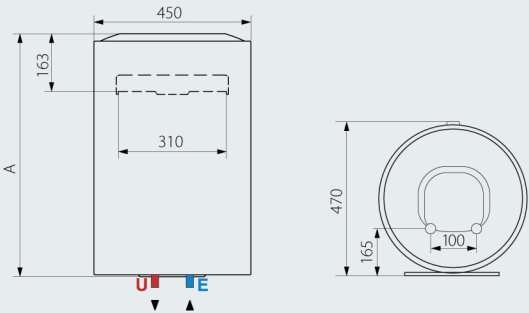

1,8 kW - TECHNICAL DATA

		LYDOS ECO 50 V 1,8K EU	LYDOS ECO 80 V 1,8K EU	LYDOS ECO 100 V 1,8K EU
Capacity	L	50	80	100
Installation	V	V	V	V
Power	KW	1,8	1,8	1,8
Voltage	V	230	230	230
Heating time (T=45 degree celsius)	h,min	1,27	2,11	2,46
Heat dispersion at 65 degree celsius	KWh/24h	0,99	1,35	1,56
Max working pressure	bar	8	8	8
Max working temperature	°C	80	80	80
Weight	kg	16	20,5	24
IP Class	IP	IPX3	IPX3	IPX3
DIMENSIONS				
A	mm	528	733	885
CODE				
 With Plug and Cable		3201857	3201858	3201859
Erp class		3201885	3201887	3201889
Tapping profile		B	B	B
		M	M	M

2 kW - TECHNICAL DATA

		LYDOS ECO 50 V 2K EU	LYDOS ECO 80 V 2K EU	LYDOS ECO 100 V 2K EU
Capacity	L	50	80	100
Installation	V	V	V	V
Power	KW	2	2	2
Voltage	V	230	230	230
Heating time (T=45 degree celsius)	h,min	1,18	1,58	2,29
Heat dispersion at 65 degree celsius	KWh/24h	0,99	1,35	1,56
Max working pressure	bar	8	8	8
Max working temperature	°C	80	80	80
Weight	kg	16	20,5	24
IP Class	IP	IPX3	IPX3	IPX3
DIMENSIONS				
A	mm	528	733	885
CODE				
 Erp class		3201860	3201861	3201862
Tapping profile		B	B	B
		M	M	M

LEGEND

E Cold water inlet G 1/2"

U Hot water outlet G 1/2"

The capacity indicated in this catalogue identifies the product category.

The effective capacity of the product is given in the relevant technical documentation provided with the product.

* Patented in Spain, patent pending in IT, FR, TK, RU, CN, VN, UAE

** Maximum estimated saving, depending on models. Comparison made using V40 test results at maximum operating temperature between current ATG products and new ATG products equipped with WaterPlus Technology.



ARISTON THERMO GROUP

Ariston Thermo SpA
Viale A. Merloni, 45 • 60044 Fabriano (AN) - ITALY

ariston.com



Tel: +355 52 220 601
Mob: +355 67 60 86 000
Web: www.thermoservice.al
eMail: info@termoservice.a